

International Journal of Environment and Climate Change

12(5): 15-30, 2022; Article no.IJECC.84546

ISSN: 2581-8627

(Past name: British Journal of Environment & Climate Change, Past ISSN: 2231-4784)

Sedimentation in East Coast Hilly Terrain Reservoirs; Balimela, Odisha

**Siba Prasad Mishra ^{a*}, Abhisek Mishra ^a, Chandan Kumar ^a
and Saswat Mishra ^b**

^a *Department of Civil Engineering, Centurion University of Technology and Management, BBSR, India.*

^b *Department of Civil Engineering, Research scholar, KIIT University, Bhubaneswar, India.*

Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/IJECC/2022/V12i530670

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/84546>

Original Research Article

Received 05 January 2022

Accepted 10 March 2022

Published 11 March 2022

ABSTRACT

Globally reservoirs behind dams are changing their hydrologic cycle under a shifting climate. Sediment, the flagship for water resources projects provide negative impact on environment and dam benefits. Sedimentation behind dams is continuous, regular through sequential paths that comprises of erosion, entrainment, transference from upper basin and deposition within the reservoirs. Present study envisages the morphometric study of the Balimela Reservoir active from 1972. The downloading of Geographic Information System (GIS), Remote sensing (RS) data from LANDSATS and making Stream order, Contour, slope and aspect maps by constructing Digital Elevation Model using the various Arc-GIS tools. The average bifurcation ratio is safe.. Considering the water-spread areas at various elevations of the years 2000, 2002, 2013, 2016, 2019 and 2022, the sediment deposits and reduction of storage volume by 29.945% by Jan 2022 since first impounding. The dam housed in hilly terrains, so there is less increase of catchment erosion except deforestation. The water from the dam optimally used by both the states Odisha and Andhra Pradesh. Preparation and strict adherence of concrete reservoir operation rule, upstream proper upstream maintenance and best catchment treatment plans shall increase the dam's longevity and utilities.

*Corresponding author: E-mail: 2sibamishra@gmail.com;

Keywords: Balimela; reservoir; globally reservoirs; arc-GIS; hydrological processes.

1. INTRODUCTION

Globally all reservoirs shaped by damming natural flow confronted by depletion of its utilized volume in later stages impact the reservoir storage capacity at various rates and reduces its paybacks. The 20th century dams constructed without environmental assessment studies that impair the natural sedimentary flow that weaken the delta building processes and deplete the reservoir function in long run (Strand et al, 1982[1], Syvitski et al., 2011[2], Mishra et al., 2017[3], Sumi et al., 2018[4], Sethi et al., 2020[5], Lee et al., 2022[6]), Principal characteristics associated with the reservoirs behind a dam are the geomorphology, hydrology and hydrogeology of the upper basin, and limnology, geology of the area. The soil attrition, drive and deposition are natural hydrological methods, but accelerated under degraded environment, under poor conservation strategies, land use and land cover changes, anthropogenic stresses, etc. Loss of life storage, depletion in dam benefits, breach/overlapping and finally affecting the downstream highly populous delta. The sustained benefits are irrigation, water supply, flood control, land paybacks, electricity energy, recreational, transportation, ecological Temporal and geospatial sediment studies is pertinent to access the life span of all the reservoirs in the state, (Navas et. al., 2009[7], Dutta et al, 2016[8], Bilal et al., 2017[9], Dorber et al., 2020[10]).

Hirakud reservoir is first (out of six) reservoirs in Odisha constructed during 1950's, followed by the Balimela interstate project serving both Odisha and Andhra Pradesh of 1970's.

The soil erosion, drive and deposition are part of natural hydrological processes. The sediment deposit rate accelerate by environmental degradation, lack of conservation measures, land use changes, deforestation etc. Average annual rates of sedimentation of various rivers are different (**Fig 1**). The ayacut area is the source for support for irrigation projects. Due to reduction of useful storages by sediment deposits reduces life of reservoirs. The sediment entry is through bed, suspended, and wash load. The quantum of entry depends upon erosivity, sediment yield/delivery ratio and trap efficiency and quality of sediment. They are the functions of rainfall, runoff, vegetation, Land Use and Land cover (LU/LC), lithology and size of the upper basin.

GIS tool with remote sensing is the efficient tool to estimate the rate sediment deposit in various sectors of the water body. The stream order, the slope, the aspect ratio and the water spread area determine the spatial accrue of sediment. Therefore, reservoir sedimentation surveys are indispensable to observe and record more realistic data/estimate to assess the rate of siltation particularly when the reservoir is aged, Iradukunda et al., 2021[11].



Fig. 1. Average annual rate of sedimentation various rivers India (Source: CWC data)

1.1 Review of Literature

Globally reservoir sediment entry reports soil erosion; transportation and trapping that cause loss of annual live storage @ 0.5-1.0% (60-120Km³ in 20th century) providing it the life span 50 to 200years, Dargahi 2012[12], Schleiss 2013[13]; Dutta et al., 2016[8], Obialor et al., 2019[14]. For sustained erosion control there is need for land use (LU) changes, judicious management practices and hike in reservoir capacity, Ayele et al 2021[15]. Sediment related problems are complex and associated with storage capacity reduction, curtailment of benefits and downstream threats. Amelioration by sediment influx control, sediment removal by routing, sediment posting and ab-initio provision of large storage volume is possible, Morish et al., 1998[16]. Reservoir's sediment control methods include stochastic/mathematical modeling, bathymetric surveys, Remote sensing (RS) methods, log core studies, LU/LC changes, and multi-frequency acoustic analysis, Dargahi, 2012[17], Rahmani et al., 2018[18], Maina et al., 2019[19], Shrestha et al 2021[20]. RS/ GIS methodologies delivers fast but approximately correct spatial changes of lacustrine areas to estimate considering spectral and geospatial attributes Jain et al. 2002 [21], Kiruthika et al. 2011[22], Gouda et al, 2015[23], Singh et al., 2021[24]. Digital elevation models (DEMs) are important depiction of GIS/or RS (remote sensing) data used in hydraulic, hydrologic, climate change (CC), watershed supervision, and water resources development (WRD) projects

(Ali et al., 2015[25], Guiamel et al., 2020[26], Tesema et al., 2021[27]).

1.2 Study Area

The Balimela Reservoir is behind the dam at Chittrakonda powerhouse on the Sileru River that rises from Eastern Ghats belt hills (EGB) range situated, Malkanagiri District of Odisha. The Sileru R. debouches in the River Sabari in Chhattisgarh (tributary of Godavari R). The Balimela dam (18^o-08'-25" N lat. and long. 82^o-07'-22" E), constructed (1962-1977) is an interstate project where the beneficiaries are the states Odisha and the AP (50:50 share), of India (Fig 1). The dam is 70m high and is having gross storage capacity of 3610 MCum. The live storage capacity of 2676MCum has been designed for generation of hydroelectric power of 510MW (installed capacity) with 135MW as Odisha share. The ≈59.43 cumec water transported by a 2 km long open channel to Surlikonda Barrage and later, irrigation potential of 90.17Tha generated through Potteru Irrigation Project (PIP) to cater the needs of Malkanagiri valley areas. The maximum outflow routed can be 13981.13 m³/s at MWL 464.76 m, O&M, CCE, PIP, GoO 2020 [28].

The (Andhra Pradesh) AP's share diverted and feed the Upper Sileru dam & (Power House) PH at Guntuwada by a separate sluice. The salient features of the dam and the reservoir given in Table 1 and Fig 2.



Fig. 2. Balimela Power House and Chittrakonda dam on the Sileru River; Odisha

Table 1. The salient features of Balimela reservoir and Dam benefits in Odisha

#	Project Factors	Information	#	Project Features	Information
1	State/District	Odisha/Malkangiri	2	Geo-Coordinates	18° 08' 25"N Lat ; 82° 07' 22"E, Long
3	Type/Design flood	Earth fill/14300Mm ³	4	Length/width	1821m/9.15m
5	Max Height (MSL)	37m	6	Catchment Area	4910 km ²
7	Mean annual R/F	1977mm	8	Design flood inflow	36750Mcum
9	Gross Storage	3610 Mm ³	10	Live Storage	2676.00 Mm ³
10	Length Dykes I; II,III	853,613, 812m	11	Housed in 4-saddles	10930m ³ /s (10bays)
12	Sluice outlets (2nos)	2x2.44 x3.66m	13	Sluice Emerg. Gate	2Nox 4.90 x 5.40 m
14	AP Tunnel	Circular 7.62m.ø	15	Odisha Tunnel	7.62m.
16	AP Tunnel dis. Capa.	383 m ³ /s	17	Odisha Tun, dish.	383 m ³ /s
18	AP Installed capacity	375MW	19	Odisha Installed cap.	135MW

Abb: R/F: Rainfall; MSL: Mean sea level; Capa: Capacity; Emerg: emergency, dis: discharge; MW: megawatt
Source: OHPC site Salient features (<http://www.ohpcltd.com/Hirakud>) [11], Government of Odisha (GOO), Rathore et al., (2006) [29], Tobgay et al 2014[30]

1.3 Necessity for Study

The 50 years old reservoir has provided in interrupted service to AP and Odisha. The sedimentation survey conducted after 27years through hydrographic survey and later by remote sensing survey in 2003 by Central water commission (CWC), India. Since the river housed in hilly areas, the intensity of precipitation and velocity of flow plays important role in the spillway discharge. The reservoir operation Rule curve tentatively fixed as n 31 August as 461.78 m, 30 Sept as 461.93 m and 31 Oct of the year as 462.08 m (FRL). The results are in Table-2.

The Balimela reservoir is in Juvenile stage as the live storage capacity is not deteriorating and the average rate of sedimentation is less. Hydraulic structures are under construction/renovation. Continuous urbanization, deforestation, and anthropogenic pressure shall accelerate erosion of the upper basin that warrants monitoring of sedimentation of Balimela reservoir (Fig 3).

1.4 Soil type in the Basin

The Sileru basin lies in southern Eastern Ghats belt with similar type of soil depending upon physiography and lithology dissimilarities. They constitutes red (Alfisols, sandy or loamy) and Ultisols (Lateritic soil). Alfisols are predominant soil type in comparison to the lateritic and black type of soil. The rocky soil is mainly neutral and

sporadically acidic. Since lies in hilly terrain with higher vegetation coverage, the erosivity of the soil is less.

1.5 Life Span of Reservoirs

After impounding of any reservoir, sediment carried from the upper reaches deposited in the dead storage and live storage zone. The size of the dead storage zone decides the life span of the reservoir and in average considered in India as 100years. The designed life span of the reservoir undergoes five stages (Stage I to Stage V) as per Central Water Commission, India.

Condition of stage I, have proposition of full life period with all designed benefit, whereas stage II reservoirs provides less benefits and retains the life span. Difficulties starts on reaching the reservoir stage III by hindering the generation and provide adequate water for irrigation and need immediate repair and renovation and desilting. The IVth and Vth stage as completely uneconomical, demands closure of the project by fixing new zero elevation building fresh reservoir curves and building different operation rule or bring innovations by renovating the old dilapidated structures. In Vth stage, (not achieved yet by any reservoir in India) the reservoir needs closure and construction of a new dam at other suitable sites is the best choice, Jacobson 1997[31], compendium, CWC - 2020[32].

Table 2. The status of sedimentation observed by CWC after first impounding in 1972

State	Name of Reservoir	Upper Basin Area	1st Impounding	Last survey	Initial live storage	Total loss live storage	loss live storage
Odisha/ Live storage 1999 HS/(CWC) MCum	Balimela (Sileru R.) Live storage 2003 (CWC RS survey) MCum	Sqkm 4908 Loss live storage (1999) %	Year 1972 Loss of dead storage up to 1999 %	Year 1999 Annual loss Gross storage	MCM 3610 Rate of silting Th.cum /sqkm/yr.	MCM 282.5 Average rate of silting Th. cum /sqkm/yr.	% 7.83 Dead storage MCum 934
2536.56	2682.17	5.21	15.32	0.29	10.46	2.13	934

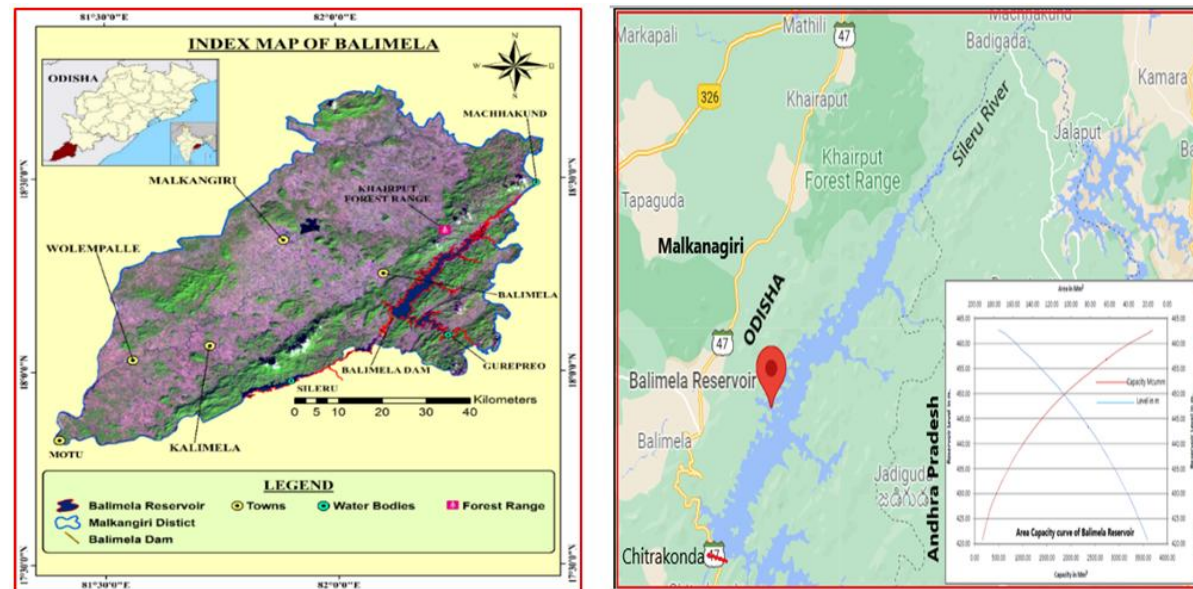


Fig. 3. The index map/ Area capacity curve of Balimela reservoir at, Malkangiri, Odisha

1.6 Sediment quantity Assessment

Sediment assessment of reservoirs conducted by conventional Bathymetric survey, observational methods (stream flow and capacity survey at regular interval) after few years of operation. Inflows vs. outflows, water depths measured along with concentration of sediment and finally converted to volumetric terms (Butt et al., 2011[33], Güvel, et al., 2021[34]). The modernized methods are in use like buoys, new surveying instruments, techniques and electronic eco-sounders etc. The process is time taking, more skilled employment and cost involvement. Robotic boat (buoy) surveys conducted at present using Global Positioning system (GPS), Remote Sensing (RS) drones or taking Global Navigation Satellite System (GNSS) system and Differential Global Positioning System (DGPS) with (Secure digital) SD card. This method is working to estimate sedimentation of Hirakud reservoir at present. RS methodology (without physical contact), uses satellites data like, light detection and ranging (LiDAR), LANDSAT, Satellite Pour l'Observation de la Terre (SPOT) and Indian Remote Sensing (IRS) data used for mapping/ monitoring the water surface area. Reservoir sedimentation estimation based on various passes of satellites at different similar time of the year, Jain et al., 2011[35], Jawak et al. 2015[36]; Uma Rajeswari et al., 2018[37], Pratomo et al 2019[38].

2. METHODOLOGY

Direct computation of reservoir sedimentation is not possible by RS methods. Comparing with ab initio area before impoundment, with present capacity as the observed water spread area of the reservoir the evaluation of sedimentation is possible. Present procedures involves Landsat

data from USGS IV and VIII followed by creation of Band Combination Composite Map using the Composite Tool provided in Arc Tool Box under Arc GIS. The unmasking of study area from composite map is the next step. Afterwards the contour map and raster data map from the topographic data created. The interpolation tool used to create Inverse Distance Weighted (IDW) map. Exporting all raster files into a separate folder, Raster Files Converted into Triangulated irregular network (TIN) format. Comparison of TIN Files by use of Surface Tool are the next step after creation of Surface Difference Map (SDM). Later exporting the Attribute Table data of SDM into MS Excel, the sedimentation analysis results obtained.

Present investigation downloading of multispectral images from various Landsat files, and making Digital Elevation Model (DEM). Images received by self-scanning) and Advanced Space-borne Thermal Emission and Reflectance Radiometer (ASTER) are being used for DEM making. The methodology includes GIS and image processing techniques like mosaicking and geo-referencing the raw data from satellite, identifying the reservoir water level, segmentation of waterbody using the pixel level analysis. The water spread area calculated by using water indexing converted in to vector polygon using ArcGIS tools. The transmittance of water significant visible spectrum (0.4-0.7 urn) has the absorption and low reflectance. The contour maps generation is possible by combining GPS and GIS or by two-dimensional model (Aziz et al., 2001[39]).

Six sets of data sets during December the satellite data used for estimation of various maps of Balimela reservoir like stream order, contour, slope, aspect and the amount of sedimentation.

Table 3. Date wise satellite data used for estimation of various maps of Balimela reservoir

Landsat File Name	Date of Data	Landsat Type
LEDZ_L2SP_142047_20001215_20200917_02.11	15-12-00	Landsat 4-5
LED7_L2SP_142047_20021221_20200916_02_T1	21-12-02	Landsat 7
LCOB_L2SP_142047_20131227_20200912_02_T1	27-12-13	Landsat 8
LCOB_L2SP_142047_20161219_20200905_02.T1	19-12-16	Landsat 8
LCOB_L2SP_142047_20191228_20200824_02_T1	28-12-19	Landsat 8
LCOB-L2SP_142047_20220102_20220106_02.11	02-01-22	Landsat 8

2.1 Stream Order

According to the Strahler (1957)[40], in river morphology the stream order maps presents an organized systematic draw of a river network with proper sizing and classify stream segments and labelling with comparison of stream type, Scheidegger 1968[41]. Stream order found in the big river like Amazon with order 12, and the Mississippi, USA has order 10. Streams (gully's and brooks) are 1st order (with no tributaries) /2nd order (with tributaries of 1st stream order) have higher gradient, flow straight down the slope with least meandering, as cascaded pools in the mountainous range. With less slope the stream widens, and are third order streams have some meandering, Tarboton 1991[42], Mishra S. P. 2021[43]). The GIS methodology uses Lines (vectors) to signify the number of gully's /streams or rivers joined at the nodes. Using tools available in ArcGIS, varying of the line width or color to indicate the different stream orders (Fig 4).

The stream order map of Balimela reservoir informs 114 numbers of 1st order braided gullies,

(not prominent in the map due to steep gradients in hilly areas), 2nd order streams are 31 and 3rd order are 17 numbers only. Since numbers of first order streams are high, the water of the reservoir is least polluted, housed in the gorge of two mountainous ranges, Briney Amanda, 2020[44].

The high bifurcation ratio, ranging between 2 and 4 indicate that the geologic formations of the reservoir area have not been affected by distortion of the drainage pattern, Khan et al., 2013[45].

The average bifurcation ratio calculated to be 2.745 (lies between 2-4) that indicates the geologic formations of Balimela reservoir area is less affected by distortion of the drainage pattern.

2.2 Contour Maps

The contour lines are transverse lines of equal elevation above MSL and the space between two consecutive contours tells about the slope of the terrain.

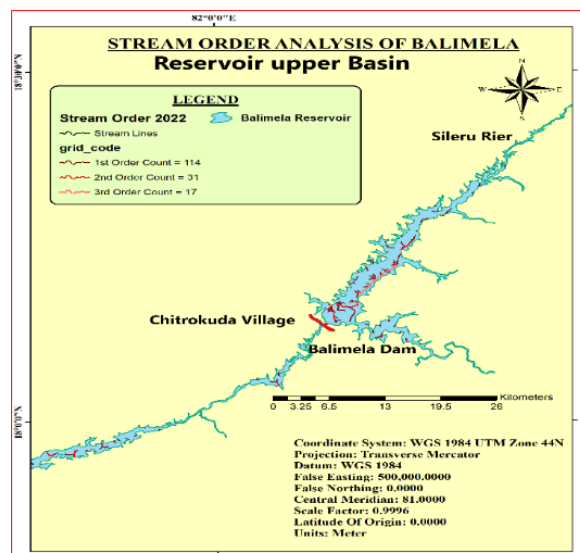


Fig. 4. Stream order map of the Balimela reservoir

Table 4. The Bifurcation ratio of various streams of different stream order

Stream order (u)	Number of stream segment	Percentage composition of stream orders (%)	Bifurcation Ratio (Rb)
1	114	70.37	
2	31	19.14	3.67
3	17	10.49	1.82
Total	162	100	Average= 2.745

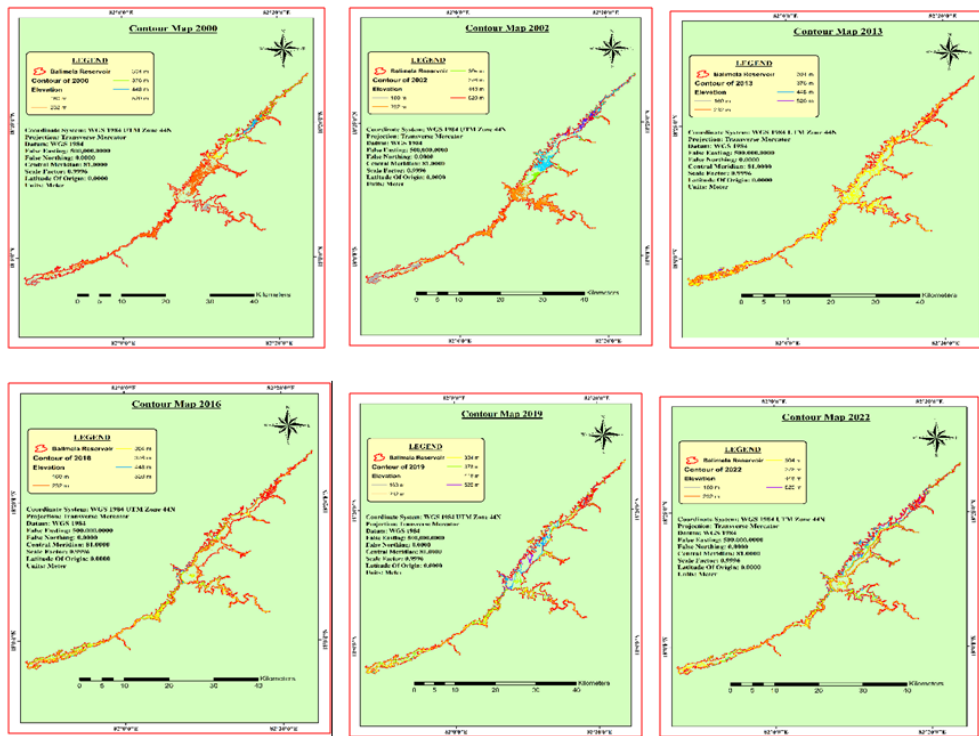


Fig. 5(a-f). The Contour maps of Balimela Reser. (Year 2000, 2002, 2013, 2016, 2019 & 2022)

The contour lines are well representative of relief features of a reservoir. The contour map made for a reservoir utilized to know about nature of the ground variability, route of fluvial flow, and distance between observing stations, estimate the storage capacity of a reservoir and its upper basin catchment area (Mishra et al 2021[46]).

Least significant changes observed from 2000 to 2022 on the overall contour lines of Balimela reservoir areas, Fig 5(a-f). However, some changes in contour lines noted between the years 2000 and 2002.

2.3 Slope Maps

The coarse sediment architecture in a reservoir received from riverine flow material that forms bars, channel bed and often deposited in the banks whereas fines near the toe of the dam or in the dead storage zone (Kondof et al., 2014.).

In surface analysis, some raster-based analyses deliver ideas about the ground perceptions of the terrain by the slope maps show the different direction of flow in different colours. The steepness stated by its saturation (steeper slopes as brighter). The erosion from upper basin of a reservoir is computed by USLE method uses

slope equation (Browning 1948) as the soil erosion losses varies with factors such as slope steepness (S), conversion (P), slope length (L), rainfall erosivity (R), soil erosivity (K), and cover management (C) given by (Dutta et al., 2016[8])

$$A=RLKSCP \quad \text{eqn 11}$$

The slope (steepness) map of the reservoir map taken for different 6years (2000, 2002, 2013, 2016, 2019 and 2022) but during the December months when the reservoir has almost same water budget status. From the six slope maps of Balimela reservoir constructed reveals that a channel formed from the entry point to right fringe of the dam gradually, Fig 6(a-f).

2.4 Aspect Map

In reservoir analysis, the input in RS is a filled DEM where the surface is flat having no undulations. Keeping in mind, the flow direction raster created considering the stream and flow network generated. Slope and aspect maps have real world applications like cropping by farmers, microclimate for the vegetation/biodiversity, and landscape features (ridges/ valleys) etc... Present study focusses on the ridges/valleys and biodiversity upper basin of the Balimela basin.

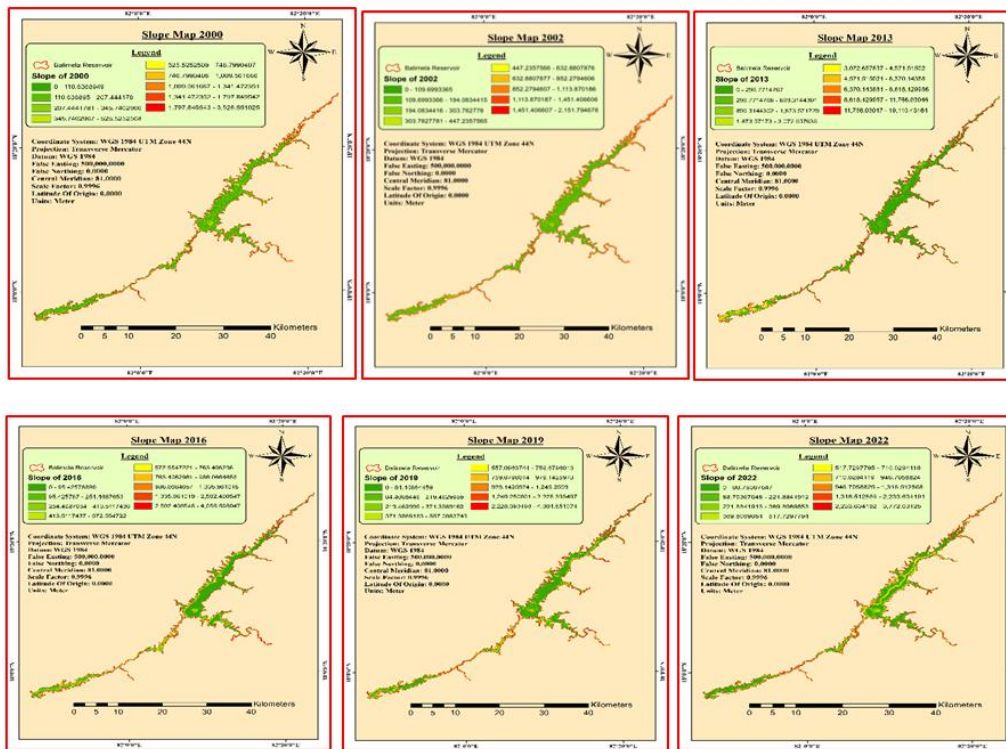


Fig. 6(a-f). The slope maps of Balimela Reser. (Year 2000, 2002, 2013, 2016, 2019 & 2022)

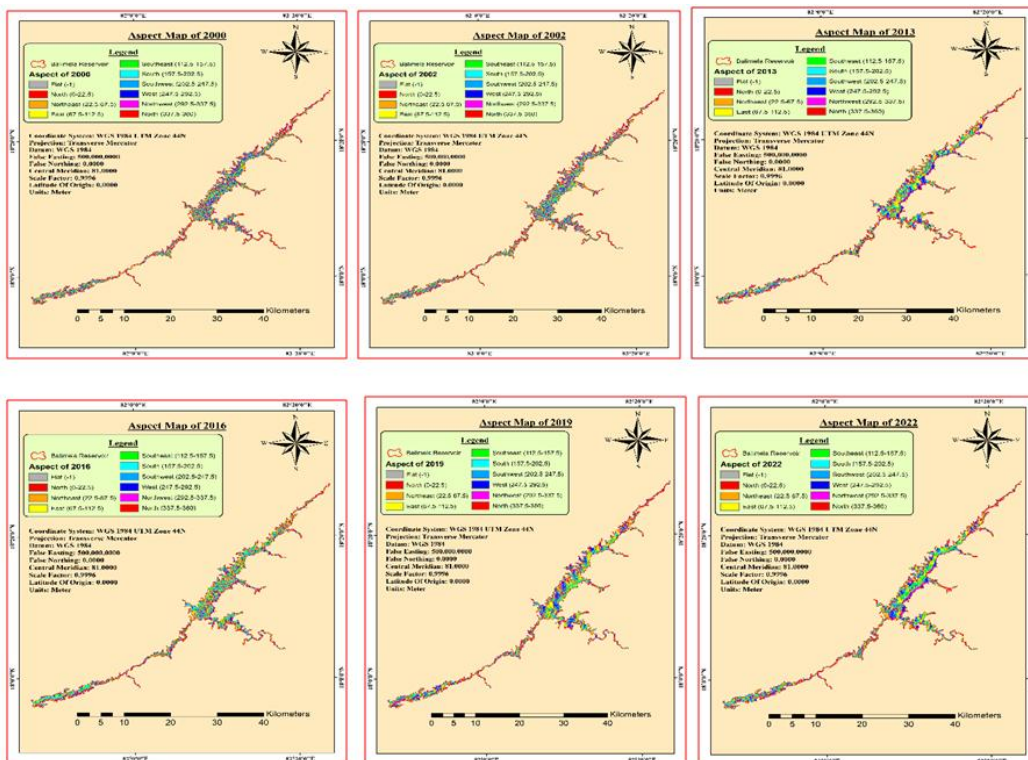


Fig. 7(a-f). The Aspect maps of Balimela Reser. (Year 2000, 2002, 2013, 2016, 2019 & 2022)

The cells with large flow accumulation values indicate stream channels, whereas cells having low flow accumulation represent uplands. The aspect map and the values associated specify the directions of the physical surface of the slopes created from free global DEM data sources. The slope and aspect maps prepared to identify the gradient and downslope direction.

From the six years aspect map, there is shift of the aspect (direction) observed. In the year 2000 to 2002, the direction of flow flat whereas, gradual change in direction of major flow shifted to the right fringe of the reservoir.

2.5 Sediment Quantity Estimation

Present case two-dimensional model used where the sediment load (S_L) varies proportionately with time (T in sec), discharge (Q_w Cum) and suspended sediment (S_s kg/cumec) given by

$$S_L \propto T \quad \dots \text{eqn 2} \quad S_L \propto Q_w \dots \dots \text{eqn 3 and } S_L \propto S_s \quad \text{eqn 4}$$

Combining the above three equations $S_L \propto S_s * Q_w * T$ eqn (5)

The suspended sediment concentration at any cross section (C_{ss}) due to discharge at the control

section (Q_w)_d, the equation is $C_{ss} = A * Length (Q_w)_d + B$ eqn 6

Where A & B are two constants for any section The sediment volume (V) estimation is possible if the density of deposit of sediment (ρ) at any point given by the equation:

$$\rho = \rho_{min} (\rho_{max} - \rho_{min})(1 - \tau) \quad \text{eqn 7}$$

Where ρ = the density of sediment dumped in time (t). ρ_{min} is Initial density at start of sedimentation, ρ_{max} is the final accumulated sediments density, and τ is the characteristic consolidation time as fixed during design. Calculation of volume (V Cum) over an area (A in m²) of sediment deposition at a section due to deposited sediment of density (ρ) at certain reach of length (L) given by the equation

$$V = Q_s / \rho \quad \text{and} \quad A = V / L \quad \dots \dots \text{eqn 8}$$

The deposition of sediment (depth) accepted to occur transverse direction irrespective of contour as the distribution of velocity. The velocity along the longitudinal distance and the transverse distance, w.r.t to time. The velocity (\vec{v}), at a sectional distance (x), about any cross section called the longitudinal distance is given by:

$$\left(\vec{v}\right) = c_1 + c_2 x_1 + c_3 x_2 + c_3 \dots \dots \dots \text{eqn 9}$$

Where

c_1, c_2, c_3, \dots etc are constants as functions of time, where $c_1 = A_1 Len (T) + B_1$ and A_1, B_1 are two constants.

Calculating area and depth per each pixel, the total water volume calculated based on the empirical model developed using the past-validated data. The cone formulae used to calculate the water volume and given by:

$$V = \frac{h}{3} (A_1 + A_2 + \sqrt{A_1 A_2}) \quad \text{eqn. 10}$$

Where V = Volume of water between two consecutive spreads, and A_1 & A_2 areas between two successive spreads. (Dadoria et al., 2017[47]).

The loss in storage affected by sedimentation since first impoundment and the yearly sediment yield rate can assess the location accrue of silt and bed load, sediment size and densities along with trap efficiency of the reservoir (Rai et al., 2017[48]).

The past floods passed through the reservoir during fag end of October and the dam has spilled 125.35, 590.23, 7689.3, 470 .37 and 964.5 cumec in the year's 1990, 1994, 2006, 2013 and 2018 when the water level in the reservoir were 462.37, 462.23, 462.26, 462.28 and 461.93m respectively (O&M manual, GoO, DOWR, 2020[28]).

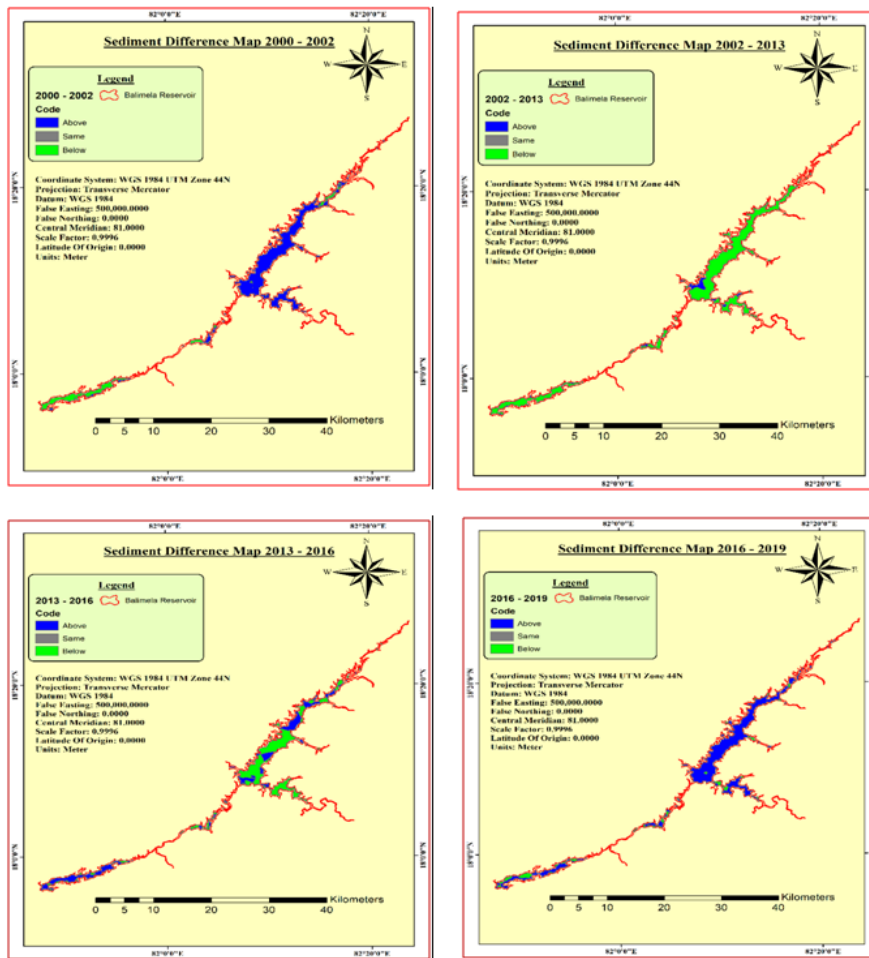


Fig. 8 (a-d). Sediment deposition in Balimela Res. (intervals 2000-2002; 2002-2013, 2013-2016)

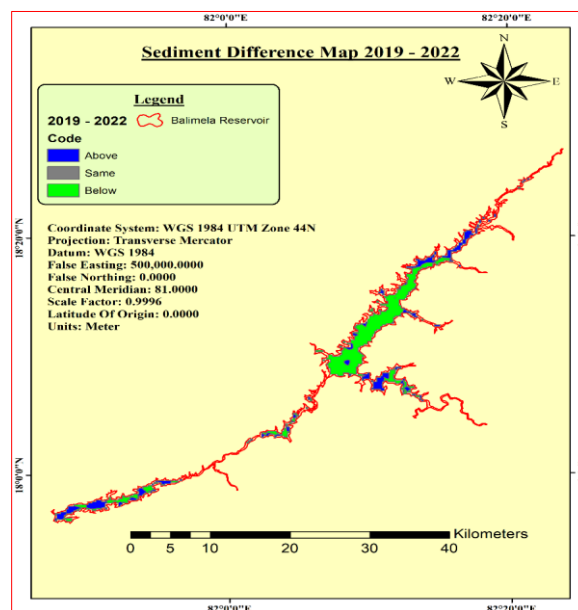


Fig. 9. Sediment deposited in Balimela Reservoir from the year 2019-2022

Table 5 . Year wise variation in Total Siltation

Reference Year	Volume MCM	in Volume loss (%)	Calculated Catchment Area (km ²)	Total Siltation (MCM)	Error % of water spread area
1999	3328.00	0.0	4908.00	NIL	
2000-2002	3261.00	2.01	5209.56	5209.56	6.14
2013-2016	3141.00	5.62	4891.66	4891.66	0.33
2016-2019	2976.00	10.58	4901.98	4901.98	0.12
2019-2022	2529.00	24.01	4974.35	4974.35	1.35 (av ≈2%)

Note: High % of error due to LANDSAT 4-5 data not matched LANDSAT 8 data with acceptable percentage of average error ≈2%

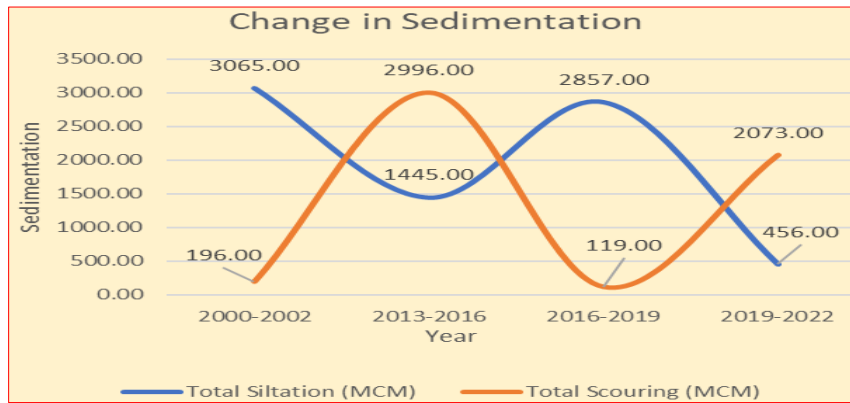


Fig. 10. The status of silting and scouring of Balimela reservoir in various by 2000-2022

Table 6. The changes in volume of storage in Balimela reservoir from 2000 to 2022

Years	Initial volume (MCM) (1972)	Volume in MCM	Sediment accrued (in %)
2000-2002	3610	3261.00	9.67%
2013-2016	3610	3141.00	12.99%
2016-2019	3610	2976.00	17.56
2019-2022	3610	2529.00	29.945%

The average annual sediment deposition in Balimela reservoir is 15.44MCM @ 0.4278%

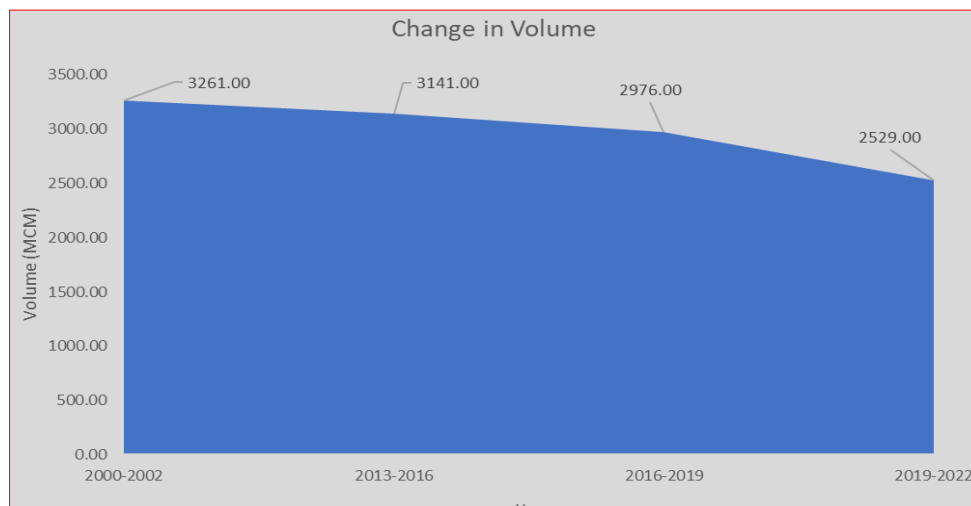


Fig. 11. The volume changes due to sedimentation considering base year 2000 as volume 3261cum

3. DISCUSSION

The cross sectional area increases reducing surface flow velocity whereas density current prevail under water. The slow but sluggish peripheral sediment trapping process reduces the live storage capacity, loss of energy generation, and affect the delta building process due to shrinking, sinking and subsidence. Proper selection of site, reservoir design, dam construction in stages, check dams, vegetation screens with catchment treatment plans and control/diversion of sediment are the pre-dam strategies need due attention during proposing the dam. Post construction policies are to regulate sediment entry and deposition in diverse segments of the body of reservoir, provision of Saxophone Sediment Sluices (SSS), removal of post floodwater, continuous mechanical agitation/drawdown flushing to keep sediment in suspension and removal by under sluices. The erosion control through check dams and vegetation cover in the upper basin along with regular monitoring of sediment status of a reservoir can enhance longevity of reservoirs, Kondolf et al., 2014[49], Pandey et al., 2016[50].

The sediment yield to the reservoir depend upon the characteristics of a river basin that accumulates in the reservoir. They are dependent upon precipitation in the upper basin, surface runoff from drainage channels, the vegetative cover, lithology and easy erodible mountainous rocks, type of soils, Land use and Land cover, slope (creates sediment entry), size of upper basin (increases if basin is small). Watershed control for less supply of sediment depends upon land use, soil conservation, inflow control, sediment diversion, vegetation, sediment-retarding structures, and check dams in its inflow drainage network.

Possible sediment control measures against entry to Balimela reservoir are catchment treatment plan, existing vegetation protection with afforestation, possible check dams, upstream Off-channel reservoirs, deposition control, efficient rule curve for reservoir operation, in time Sluicing/Flushing, and inclusive dredging, White 2000[51], Panda et al., 2020 [52].

According to CWC, the rate of sedimentation and annual percentage loss of capacity is 0.95% in gross storages and 0.67% in live storage, observed based on Hydrographic surveys. Similarly for east flowing rivers up to Godavari is

(6.8 Ham/100sq.km/year) @0.68 mm/year observed in the east flowing rivers up to Godavari (Compendium Sediment reservoirs, CWC, 2020[18]). In case of Balimela reservoir, the rate of sedimentation for initial 27years was 2.132 Th. Cum/Km²/year. Present study reveals that the average annual sediment deposition is 4.277 Th. Cum/Km²/year @ 0.4278% from 1972 to 2022, which is less than the 0.95%.

4. CONCLUSION

From the morphometric study of the reservoir at Balimela across the river Sileru, the following conclusions are drawn:

1. The upper basin of the river Sileru has stream order 4 and the bifurcation ratio is 2.745 indicating the drainage pattern has not disturbed by the reservoir formation.
2. The contour map shows least significant changes of contours during 21st century.
3. From the aspect and slope map, it is pertinent that gradual changes of flow direction has shifted from left to right fringe of the reservoir.
4. The sedimentation since first impounding, the reservoir has lost its volume to a tune of about 29.945%.
5. The average annual sediment deposition in Balimela reservoir is 4.277 Th. Cum/Km² /year @ 0.4278%, which is, less than the other east flowing rivers up to Godavari basin.

Though rate of sedimentation is less than the average, but the amount of sedimentation occurred, the basin managers cannot be ignore. It is high time to prepare the reservoir rule curve and stress on removal of the sediments that has already occurred. Further regular sedimentation estimation needed to save the reservoir for future management strategies.

DISCLAIMER

The products used for this research are commonly and predominantly use products in our area of research and country. There is absolutely no conflict of interest between the authors and producers of the products because we do not intend to use these products as an avenue for any litigation but for the advancement of knowledge. Also, the research was not funded by the producing company rather it was funded by personal efforts of the authors.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Strand RI, Penibertori EL. Reservoir sedimentation; Technical guideline for bureau of reclamation. Sedimentation and river hydraulics, section hydro. Branch division of planning technical services engineering and research center. Denver, Colorado. 1982:1-46
2. Syvitski JPM, Kettner A. Sediment flux and the Anthropocene. *Phil. Trans. R. Soc. A.* 2011;369:957–975. Available:<http://doi.org/10.1098/rsta.2010.0329>
3. Mishra SP. Stochastic Modeling of Flow and Sediment of the Rivers at Delta Head, East Coast of India, *Am. J. of Operations Res.* 2017;07 (06):1-17.
4. Sumi, T.; Kantoush, S.A. Innovative strategies for managing reservoir sedimentation in Japan. *HydroLink* 2018;4:100–10
5. Sethi BK, Mishra SP, Sethi K, Barik K. Deltaic Expansions of the Mahanadi Tri-delta and the Chilika Lagoon: Geospatial Approach. *Cur. J. of Applied Sc. and Tech.*, 2020;39(34):46-65. Available:<https://doi.org/10.9734/cjast/2020/v39i3431036>
6. Lee FZ, Lai JS, Sumi T. Reservoir Sediment Management and Downstream River Impacts for Sustainable Water Resources—Case Study of Shihmen Reservoir. *Water.* 2022;14:479. Available: <https://doi.org/10.3390/w14030479>
7. Navas A, Valero-Garcés B, Gaspar L, Machín J. Reconstructing the history of sediment accumulation in the Yesa reservoir: an approach for management of mountain reservoirs, *Lake and Res Management.* 2009;25:1(15-27). DOI: 10.1080/07438140802714304
8. Dutta S. Soil erosion, sediment yield and sedimentation of reservoir: a review. *Model. Earth Syst. Environ.* 2016;2:123. Available:<https://doi.org/10.1007/s40808-016-0182-y>
9. Bilal A, Dai W, Larson M, Beebo QN, Xie Q, (). Qualitative simulation of bathymetric changes due to reservoir sedimentation: A Japanese case study. *PLoS One.* 2017;12(4):e0174931, Available:<https://doi.org/10.1371/journal.pone.0174931>
10. Dorber M, Arvesen A, Gernaat D. et al. Controlling biodiversity impacts of future global hydropower reservoirs by strategic site selection. *Sci Rep.* 2020;10:21777. Available: <https://doi.org/10.1038/s41598-020-78444-6>
11. Iradukunda P, Bwambale E. Reservoir sedimentation and its effect on storage capacity – A case study of Murera reservoir, Kenya, *Cogent Eng.*, 2021;8:1, 1917329. DOI: 10.1080/23311916.2021.1917329;
12. Dargahi B. Reservoir Sedimentation. In: Bengtsson L., Herschy R.W., Fairbridge R.W. (Eds) *Encyclopedia of Lakes and Reservoirs.* Encyclopedia of Earth Sciences Series. Springer, Dordrecht; 2012. Available: https://doi.org/10.1007/978-1-4020-4410-6_215
13. Schleiss AJ. Sedimentation of Reservoirs. In: Bobrowsky P.T. (Eds) *Encyclopedia of Natural Hazards.* Encyclopedia of Earth Sciences Series. Springer, Dordrecht; 2013. Available: https://doi.org/10.1007/978-1-4020-4399-4_312
14. Obialor CA, Okeke OC, Onunkwo AA, Fagorite VI, Ehujuo NN. Reservoir sedimentation: causes, effects and mitigation, *Int. J. of Adv. Academic Res., Sci., Tech. and Eng.*, 2019;5(10):92-109
15. Ayele GT, Kuriqi A, Jemberrie MA, Saia SM, Seka AM, Teshale EZ, et al. Sediment Yield and Reservoir Sedimentation in Highly Dynamic Watersheds: The Case of Koga Reservoir, Ethiopia. *Water.* 2021;13(23):3374. Available:<https://doi.org/10.3390/w13233374>
16. Morris GL, Fan J. Reservoir Sedimentation. Handbook, McGraw-Hill Book Co., New York., 1998:1-784
17. Dargahi B. Reservoir sedimentation. In *Encyclopedia of earth sciences series*, L. Bengtsson, RW, Herschy RW. Fairbridge(Editors). Springer, Dordrecht, The Netherlands. 2012:628–14
18. Rahmani V, Kastens JH, DeNoyelles F, Jakubauskas ME, et al. Examining Storage Capacity Loss and Sedimentation Rate of Large Reservoirs in the Central U.S. Great Plains, *Water.* 2018;10(2):190.

- Available:<https://doi.org/10.3390/w10020190>
19. Maina CW, Sang JK, Raude JM, Mutua BM, Moriasi DN. Sediment distribution and accumulation in Lake Naivasha, Kenya over the past 50 years. *Lakes & Reservoirs: Research & Management*. 2019;24(2):162–172.
Available: <https://doi.org/10.1111/lre.12272>
 20. Shrestha B, Cochrane TA, Caruso BS, Arias ME, Wild TB. Sediment management for reservoir sustainability and cost implications under land use/land cover change uncertainty. *Water Resources Res*. 2021:57.
Available:<https://doi.org/10.1029/2020WRO28351>
 21. Jain SK, Singh P., and Seth, SM. Assessment of sedimentation in Bhakra Reservoir in the western Himalayan region using remotely sensed data. *Hydrological Sciences Journal*. 2002;47(2): 203–212.
DOI:10.1080/02626660209492924
 22. Gouda KC, Manmohan, V, Bhat R. Monitoring and Estimation of Reservoir Water Volume using Remote Sensing and GIS. *Nagaraj Bhat Geophysical Research Abstracts*. 2015:17.
EGU2015-1123, 2015EGU
 23. Kiruthika AM, et al. Silt sediment analysis for Devarabelekere Reservoir using remote sensing and GIS. *International Journal of Earth Sciences and Eng*. 2011;04(01): 24–30.
 24. Singh S, Prasad B, Tiwari HL. Sedimentation analysis for a reservoir using remote sensing and GIS techniques. *ISH Journal of Hydraulic Eng*. 2021:1-9.
 25. Ali A. Md, Solomatine DP, Di Baldassarre G. Assessing the impact of different sources of topographic data on 1-D hydraulic modelling of floods. *Hydrol. Earth Syst. Sci*. 2015;19:631–643.
 26. Guimel IA, Lee HS. Watershed modelling of the Mindanao River Basin in the Philippines using the SWAT for water resource management. *Civ. Eng. J*. 2020;6(4):626–648.
 27. Tesema TA. Impact of identical digital elevation model resolution and sources on morphometric parameters of Tena watershed, Ethiopia. *Heliyon*. 2021;7(11): e08345.
Available:<https://doi.org/10.1016/j.heliyon.2021.e08345>
 28. Government of Odisha. Operation and maintenance (O&M) manual Balimela dam. Project ID code: OR10MH0061, CCE, PIP, Balimela, Mlknagiri, Odisha. 2020:1-124
 29. Rathore DS, Choudhary A, Agarwal RK. Assessment of sedimentation in Hirakud reservoir using digital remote sensing technique, *Journal of the Indian Society of Remote Sensing*, 2006;34(4).
 30. Tobgay S. The temporal analysis of area capacity relation of Hirakud reservoir, Bachelor of Technology Thesis, Civil Engineering, National Institute of Technology, Rourkela, India; 2014.
 31. Jacobson T. Sediment problems in reservoirs, control of sediment deposits, Doctoral dissertation the Norwegian University of Science and Technology, Trondheim, Norway, IVB Report B2-1997-3, 1997:1-163
 32. Central water Commission. Compendium on Sedimentation of Reservoirs in India. Watershed & reservoir sedimentation Directorate, Environment Management Org., Water Planning and Projects Wing. 2020:1-460.
 33. Butt MJ, Mahmood R, Waqas A. Sediments deposition due to soil erosion in the watershed region of Mangla dam. *Environ Monit Assess.*, 2011;181(1-4):419-29.
DOI: 10.1007/s10661-010-1838-0.
 34. Güvel ŞP, Akgül MA, Yurtal R. Investigation of sediment accumulation in Berdan Dam Reservoir using bathymetric measurements and Sentinel-2 Data. *Arab J Geosci* 2021;14:2723.
Available: <https://doi.org/10.1007/s12517-021-09089-6>
 35. Jain SK, Jain SK. Assessment of reservoir sedimentation using remote sensing, sediment problems and sediment management in Asian River Basins (Proceedings of the Workshop held at Hyderabad, India, September 2009). *IAHS Publ*. 349 2011; 2011.
 36. Jawak SD, Vadlamani SS, Luis AJ. A synoptic review on deriving bathymetry information using remote sensing technologies: models, methods and comparisons. *Adv Remote Sens*. 2015;4:147-162
 37. Umarajeswari S, Ilangovan R, Saravanan S, Jegan J. A review on reservoir capacity loss due to sedimentation studies using remote sensing technique, *International*

- Journal for Innov. Res. in Multidisciplinary Field, ISSN:2455–0620. 2018;4:12,
38. Pratomo DG, Khomsin, Putranto BFE. Analysis of the green light penetration from airborne LIDAR bathymetry in shallow water area, Geomatics International Conference 2019. IOP Conf Ser Earth Environ Sci 2019;389:012003. Available: <https://doi.org/10.1088/1755-1315/389/1/012003>
 39. Aziz, AMA. Estimation and prediction of contour maps of Aswan high dam reservoir using a two-dimensional model. Conference: Eighth International Symposium on River Sedimentation, 3-5, Cairo, Egypt; 2001. DOI: 10.13140/2.1.4776.9923.
 40. Strahler AN. Quantitative analysis of watershed geomorphology, Trans. Am. Geophysics. Union. 1957;38(6):913–920.
 41. Scheidegger AE. Stream orders. In: Geomorphology. Encyclopedia of Earth Science. Springer, Berlin, Heidelberg; 1968. Available: https://doi.org/10.1007/3-540-31060-6_355
 42. Tarboton DG, Bras RL, Rodriguez-Iturbe I. On the Extraction of Channel Networks from Digital Elevation Data. Hydrological Processes. 1991;5:81–100.
 43. Mishra SP, Patel A, Mishra A, Chandan Ku. Geomorphologic Change in Nagavali River Basin: Geospatial Approach. Int. J. of Env. and CC. 2021;11(12):235-250.
 44. Briney Amanda. Stream Order; A Classification of the Rank of Streams and Rivers; 2020. Available: <https://www.thoughtco.com/what-is-stream-order-1435354>
 45. Khan JA, Sunitha V, Ganesh G, Reddy MR. Morphometric analysis using spatial information technology: A case study from Bhakarapeta watershed, Andhra Pradesh, India. Int. J. of Earth Sci. and Eng. 2013;6(2):322-330
 46. Mishra SP, Patel A, Mishra A, Chandan Ku, Mishra S, Patel A. Estimation of Sediments in Rengali Reservoir, Odisha (India) Using Remote Sensing. Int. J. of Env. and Climate Change 2021;11(12): 205-225. DOI: 10.9734/IJECC/2021/v11i123057
 47. Dadoria D, Tiwari HL, Jaiswal RK. Assessment of Reservoir Sedimentation In Chhattisgarh State Using Remote Sensing and GIS. International Journal of Civil Engineering and Technology, 2017;8(4):526–534.
 48. Rai PK, Mohan K, Mishra S. et al. A GIS-based approach in drainage morphometric analysis of Kanhar River Basin, India. Appl Water Sci. 2017;7:217–232. Available: <https://doi.org/10.1007/s13201-014-0238-y>
 49. Kondolf GM, Gao Y, Annadale GW. et al. Sustainable sediment management in reservoirs and regulated rivers: Experiences from five continents, Earth's Future. 2014:2. DOI: 10.1002/2013EF000184.
 50. Pandey A, Chaube UC, Mishra SK, Kumar D. Assessment of reservoir sedimentation using remote sensing and recommendations for desilting Patratu Reservoir, India, Hydro. Sci. J., 2016;61:4:711-718. DOI: 10.1080/02626667.2014.993988
 51. Panda SR, Barik KK, Mishra Siba Prasad. Watershed Management of Joda-Barbil Mining Area, Odisha, India: A Geospatial Approach, Current journal of applied Science and technology, ISSN: 2457-1024. 2020;39(31): 105-115, DOI:10.9734/CJAST/2020/v39i3130995
 52. White WR. Contributing paper flushing of sediments from reservoirs. Prepared for thematic review IV.5: operation, monitoring and decommissioning of dams. Cape Town: World Commission on Dams; 2000.

© 2022 Mishra et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/84546>