



International Journal of Environment and Climate Change

Volume 14, Issue 2, Page 382-391, 2024; Article no.IJECC.108734

ISSN: 2581-8627

(Past name: British Journal of Environment & Climate Change, Past ISSN: 2231-4784)

Spatio-temporal Variability of Reference Evapotranspiration and Trend Analyze of Crop Water Requirement

Ronald Mayengbam ^{a*} and Shraddha Rawat ^{a++}

^a *Department of Environmental Sciences and NRM, College of Forestry, Sam Higginbottom University of Agriculture, Technology and Sciences, Prayagraj, Uttar Pradesh, 211007, India.*

Authors' contributions

This work was carried out in collaboration between both authors. Both authors read and approved the final manuscript.

Article Information

DOI: 10.9734/IJECC/2024/v14i23953

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/108734>

Original Research Article

Received: 01/12/2023

Accepted: 05/02/2024

Published: 10/02/2024

ABSTRACT

The study was aimed to analyse the trend of Reference Evapotranspiration (ET_o) for estimation of Crop Water Requirement (CWR) for Rice (*Oryza sativum*) cultivation in Manipur from 2011-2021 in 16 districts (Bisnupur, Churachandpur, Jiribam, Imphal East, Kamjong, Senapati, Imphal West, Tengnoupal, Ukhrul, Thoubal, Noney, Pherzwal, Chandel, Kakching, Tamenglong and Kangpokpi) ET_o and CWR was estimated using CROPWAT. Spatial trends of climate variables were analysed using Mann– Kendall test and Sen's slope estimator.

Keywords: Crop water requirement; cropwat; rice; reference evapotranspiration; rice cultivation.

⁺⁺ Assistant Professor;

^{*}Corresponding author: E-mail: mayengbamronald2@gmail.com;

1. INTRODUCTION

It is essential to estimate the CWR of diverse crops in order to accurately build an irrigation system and conserve the most water feasible. For irrigation planning and water management, precise measurement of the crop's water needs is vital. Using crop coefficient (K_c), the amount of water a crop needs to grow may be determined from the reference evapotranspiration. The rate at which readily accessible soil water evaporates from certain vegetated surfaces is the definition of evapotranspiration (ET_o), which is the term used here. After rainfall, ET is one of the most significant factors in the hydrological cycle that influences the amount of water that crops need in certain locations. The FAO Penman-Monteith method was approved by the FAO experts as the industry standard for defining and calculating reference evapotranspiration (ET_o) and crop water requirements. In all climates and regions, the FAO Penman-Monteith approach yields constant ET_o values [1].

For its best use, a methodical and scientific planning process is essential. Modern irrigation methods will go a long way toward reducing water consumption and saving water, bringing more regions under control and ultimately increasing agricultural productivity. The CROPWAT model is used to calculate the water requirements and irrigation planning for major crops including sugarcane, rice, tobacco, etc [2].

The CROPWAT model plays a crucial role in enhancing crop yield in water-scarce conditions, particularly for major crops like sugarcane, wheat, cotton, and rice. By determining water requirements and aiding in irrigation planning, CROPWAT enables the development of recommendations for optimizing irrigation practices. This includes managing schedules based on varying water needs and estimating productivity in rainfed or limited irrigation scenarios. Climate and water pressure significantly impact anticipated yield losses, with the primary drop occurring during the growing stage in both rainfed and irrigated scenarios. Scientists widely employ CROPWAT for estimating Crop Water Requirements (CWR), crop evapotranspiration, and irrigation planning, utilizing software tools introduced by the Food and Agriculture Organization (FAO) [3].

2. METHODOLOGY

2.1 Study Area

The study covered all districts of Manipur, situated between latitudes $23^{\circ}83'N$ – $25^{\circ}68'N$ and longitudes $93^{\circ}03'E$ – $94^{\circ}78'E$, spanning 22,327 square km. The valley slopes from North to South, and the surrounding mountain ranges shield it from cold winds and cyclonic storms. Manipur climate, influenced by its hilly topography, is generally mild at 790 meters above sea level. The climate of Manipur is moderate. Climate in the western part of the state is tropical whereas the rest part of the state experiences sub tropical climate with distinct summer, winter and rainy seasons. The valley gets the reflection of the heat of the summer and the cold of the winter from the hills. Average annual rainfall ranges from 1250 mm to 2700 mm. The months of November, December, January and February remain dry and the remaining eight months are more or less rainy. January is the coldest month and May-June are hottest months. The maximum temperature in the summer months is $32^{\circ}C$ ($90^{\circ}F$).

2.2 Cropwat

Computer model simulation is an emerging trend in the field of water management. CROPWAT is a powerful simulation tool which analyzes complex relationships of on farm parameters such as the crop, climate, and soil, for assisting in irrigation management and planning. CROPWAT is one of the models extensively used in the field of water management throughout the world. CROPWAT facilitates the estimation of the crop evapotranspiration, irrigation scheduling and agricultural water requirements with different cropping patterns for irrigation planning.

2.3 Reference Crop Evapotranspiration (ET_o)

The Evapotranspiration values calculated using the Penman-Monteith equation. Its rate from a well-watered reference surface is known as reference Evapotranspiration (ET_o), symbolized as ET_o . It is calculated using the Penman-Monteith Model [4], which employs directly measured or easily calculated parameters from weather data. This model allows for the direct calculation of crop Evapotranspiration (ETC). The concept of ET_o , based on a hypothetical grass reference crop, ensures consistency in studying atmospheric evaporative demand,



Fig. 1. Map of study area (Manipur)

independent of crop type and management practices. The FAO Penman-Monteith equation represents the physical and physiological factors influencing Evapotranspiration. ETo provides a universal reference, eliminating the need for separate ET levels for different crops and growth stages. As water availability is ample at the reference surface, soil factors do not influence ET. ETo values from different locations or seasons are comparable, offering a standardized measure for different surfaces. The mathematical expression is simplified for ease of calculation.

$$ETO = \frac{0.408\Delta(R_n - G + \gamma^{900} \text{uz}(es-ea))}{T + 273} \Delta + \gamma(1 + 0.34\mu_2)$$

Where,

- ETO = Reference Evapotranspiration (mm per day)
- R_n = Net radiation at the crop surface (MJ/m² per day)
- G = Soil heat flux density (MH/m² per day)

T = Mean daily air temperature at 2m height (°C)
 u_2 = Wind speed at 2m height (m/s)
 E_s = Saturation vapor pressure (kPa)
 e_a = Actual vapor pressure (kPa)
 $e_s - e_a$ = Saturation vapor pressure deficit (kPa)
 γ = Psychrometric constant
 Δ = Slope vapour pressure curve [kPa °C⁻¹]

2.4 Estimation of Crop Water Requirement (ETc)

Crop Water Requirement is the amount of water needed to meet the water loss through Evapotranspiration Estimation of the crop water requirement is derived from crop Evapotranspiration (crop water use) which is the product of the reference Evapotranspiration (ET_o) and the crop coefficient (K_c) The reference Evapotranspiration (ET_o) is estimated based on the FAO Penman-Monteith method, using climatic data [4].

$$ET_c = ET_o \times K_c$$

Where,

ET_c = Actual Evapotranspiration by the crop (mm/day)

ET_o = Reference crop Evapotranspiration (mm/day)

K_c = Crop coefficient at a certain growth stage

2.5 Trend Analysis Mann-Kandell Test

In the present study, trend analysis has been done by using non-parametric Man-Kendall test. This method tests whether there is a trend in the time series data. It is a statistical test widely used for trend analysis, used for detection of statistically significant trend in variables like rainfall, temperature and stream flow. According to this test, the null hypothesis H₀ assumes that there is no trend and this is tested against the alternative hypothesis H₁, which assumes that there is a trend Ndayisaba et al.[5].

2.6 Sen's Slope Estimator

Sen's slope estimation (Sen 1968) is another non-parametric method for trend analysis of precipitation data. It is used to detect the magnitude of the trend.

Where is the data values for j and k times of a period where j > k. Median is computed from N observations of the slope to estimate the Sen's Slope estimator.

3. RESULTS AND ANALYSIS

3.1 Spatio Temporal Variation of Temperature and Rainfall for Different Districts of Manipur

The value of annual variation in temperature and rainfall for all 16 districts of Manipur during the period of 2011-2021 has been shown in Table 1 Generally in Manipur the highest temperature is observed in the month of June and lowest in December. The minimum temperature out of 16 districts of Manipur was observed in Senapati and maximum temperature in Bisnupur. From the Table.1 it has been observed that minimum average temperature is lowest in case of Senapati (11.00°C) and Ukhru (12.16°C) stations. While the highest average maximum temperature has been observed in Bisnupur (34.64°C) and Tengnoupal (33.42°C) station. The overall range of average maximum temperature for different 16 districts lies between 28.44°C to 34.64°C and average minimum temperature lies between 11.00°C to 17.10°C.

3.2 Spatio-temporal Variation in ET_o (Reference Evapotranspiration)

3.2.1 Annual

It is clear from the Fig. 2 that mean ET_o was found maximum in Bisnupur and Tengnoupal 1972.05- 1916.59mm/period. While, ET_o was minimum for the Imphal West and Imphal east 1581.07-1581.15mm/period. Similarly,

Tadesse et al., [6] noted peak ET_o in the far southern and eastern regions, with lower values in the western and southern parts. Significant temporal variations were observed, with the highest ET_o (4.61mm day⁻¹) in March during the dry season and the lowest in July during the main rainy season. The study's findings can directly aid engineers and irrigation practitioners in design efforts when data is lacking.

3.2.2 Seasonal

Fig. 3 illustrates average ET_o changes per season across Manipur's 16 districts from 2011 to 2021. Seasons are categorized as monsoon (June-August), post-monsoon (September-November), winter (December-February), and pre-monsoon (March-May). Tamenglong consistently had the lowest ET_o across all seasons, with minimum values in post-monsoon (204.3mm/period), winter (271.5mm/period),

monsoon (345.4mm/period), and summer (455.9mm/period). Ukhurul recorded the highest ETo for monsoon (676mm/period), while Bisnupur had the maximum ETo for post-monsoon (236.6mm/period), summer (680.2mm/period), and winter (360.6mm/period).

Table 1. Spatio Temporal variation of temperature and rainfall for different of districts of Manipur

S. No.	Districts	T min	T max	Rainfall
1	Imphal west	13.49	28.44	1441.36
2	Imphal east	13.49	28.44	1441.36
3	Churachandpur	13.99	29.96	1387.58
4	Thoubal	13.99	29.96	1387.58
5	Chandel	13.99	29.96	1387.58
6	Ukhurul	12.16	28.94	1311.96
7	Bisnupur	17.10	34.64	1518.68
8	Kakching	13.99	29.96	1387.58
9	Tengnoupal	15.41	33.42	1184.47
10	Tamenglong	13.49	28.44	1441.36
11	Senapati	11.00	27.25	1456.14
12	Pherzwal	15.87	32.72	1955.12
13	Noney	13.49	28.44	1441.36
14	Kangpokpi	13.49	28.44	1441.36
15	Kamjong	12.16	28.94	1311.96
16	Jiribam	15.70	31.60	1962.12
	SD	2.084	1.526	206.97
	MEAN	29.973	13.925	1466.09
	CV	6.953	10.962	0.141

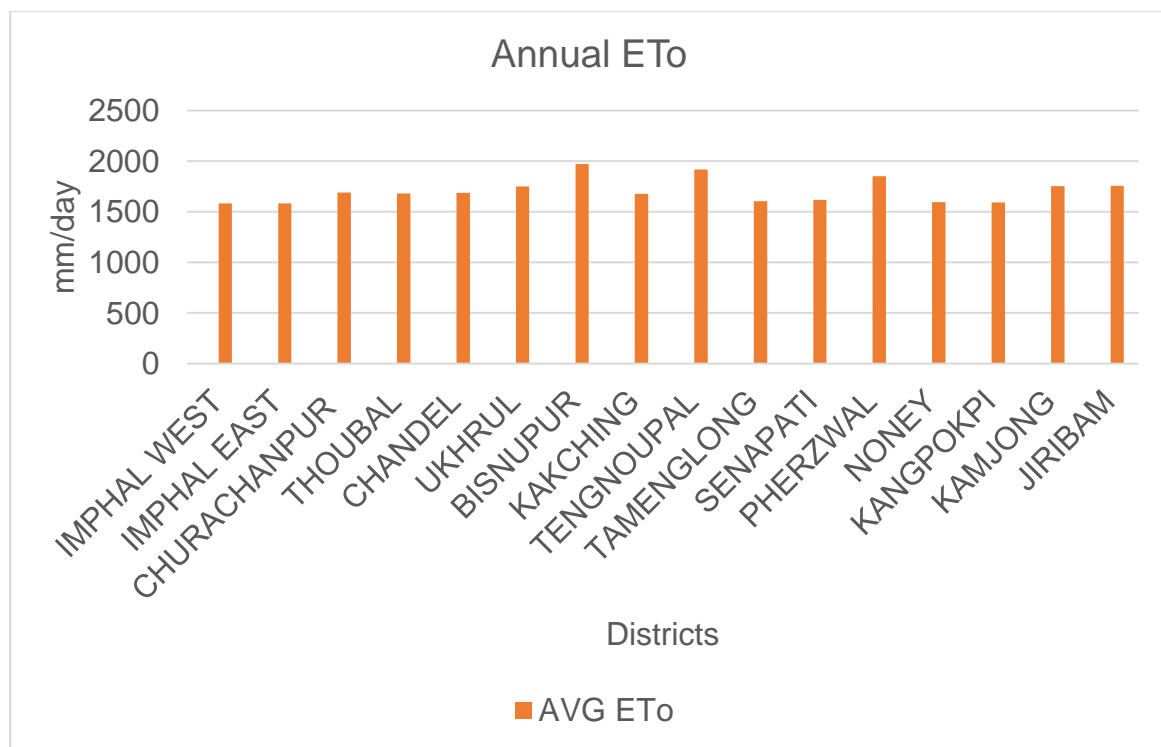


Fig. 2. Variation in annual ETo (2011-2021)

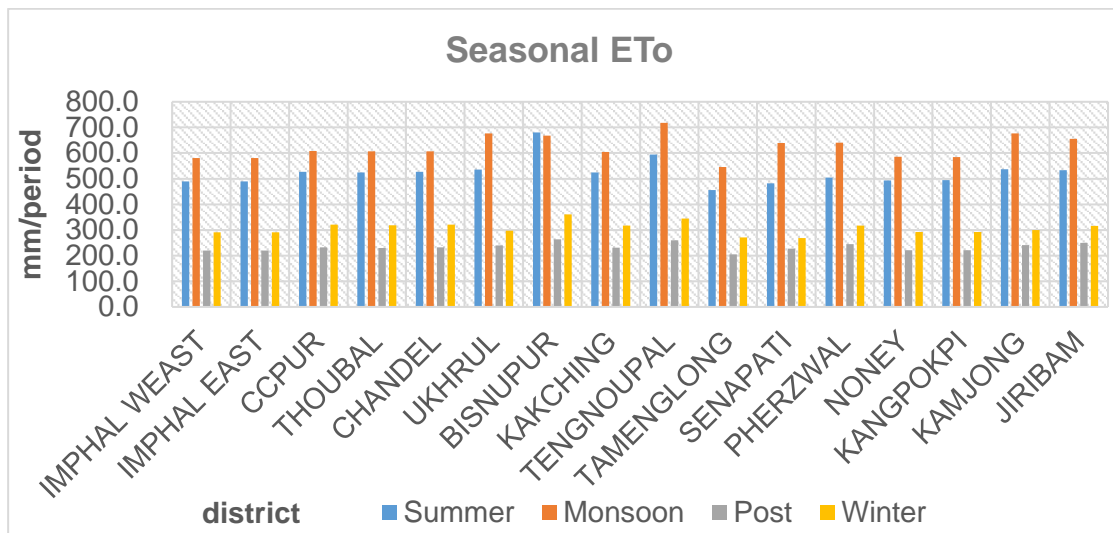


Fig. 3. Variation in seasonal ETo

3.3 Trend Analysis in ETo (Reference Evapotranspiration)

3.3.1 Annual

The Man-Kendall test results for annual ETo (Table 2) show non-significant trends in all 16 districts, with 15 displaying positive trends and one (Bisnupur) having a negative trend.

Table 2. Trend analysis of annual ETo

Districts	Zc	Qi
Imphal west	0.62	3.80
Imphal east	0.78	3.89
Churachandpur	0.31	3.01
Thoubal	0.31	3.82
Chandel	0.47	3.92
Ukhrul	0.62	6.54
Bisnupur	-0.62	-3.36
Kakching	0.47	6.08
Tengnoupal	0.47	4.94
Tamenglong	1.09	6.46
Senapati	0.47	3.27
Pherzwal	0.16	2.36
Noney	0.62	3.79
Kangpokpi	0.47	4.53
Kamjong	0.62	6.43
Jiribam	0.16	4.37

Jhajharia et al. [7] reported a significant decrease in annual and seasonal ETo across six sites in NE India, with more pronounced reductions in the pre-monsoon season. The decline is attributed to lower net radiation and wind speed, which counteracted the impact of rising

temperatures, particularly in the humid region of northeast India.

3.3.2 Seasonal

The results of the Man-Kendall test for seasonal ETo (Table 3) indicate significant trends at the 0.01 level of significance for Ukhrul and Kamjong during the post-monsoon and monsoon periods. Tengnoupal and Senapati also exhibit significance at the 0.05 level during the post-monsoon and monsoon seasons, while Noney and Jiribam show significance at the 0.1 level during the post-monsoon and monsoon.

3.4 Estimation of Crop Water Requirement for Rice

Table 4 further illustrates the water requirements at different stages of the crop. In the nursery stage (May), Bisnupur has the highest water requirement (116.96mm), and Noney has the lowest (77.21mm). In the initial stage (June), Bisnupur again has the highest requirement (163.18mm), while Imphal West and Imphal East have the lowest (111.98mm). The development stage (July) sees the highest requirement in Imphal West (166.26mm) and the lowest in Tengnoupal (212.06mm). The mid-stage (July, August) has the highest requirement in Tengnoupal (293.87mm) and the lowest in Imphal West (232.96mm). Finally, in the late stage (September, October), Tengnoupal requires the most water (222.55mm), and Imphal East requires the least (170.07mm).

Table 3. Trend analysis of seasonal ETO

Districts	Pre-monsoon		Monsoon		Winter		Post-monsoon			
	Zc	Qi	Zc	Significance	Qi	Zc	Qi	Zc	Significance	Qi
Imphal West	0.31	1.23	1.56		2.08	0	0.02	1.56		2.09
Imphal East	0.31	1.23	1.56		2.08	0	0.03	1.56		2.09
Churachandpur	0.62	1.01	0.31		0.27	0	0.19	0.31		0.27
Thoubal	0.62	0.78	0.31		0.37	0	0.28	0.31		0.37
Chandel	0.62	1.44	0.31		0.58	0.16	0.2	0.31		0.59
Ukhrul	0.31	1.39	2.80	**	3.02	0	-0.26	2.8	**	3.02
Bisnupur	-0.78	-1.27	0.31		0.38	0	-0.33	0.31		0.38
Kakching	0.62	1.62	0.31		0.35	0.16	1.35	0.31		0.36
Tengnoupal	0.16	0.85	2.02	*	1.88	-0.16	-0.78	2.02	*	1.88
Tamenglong	-0.78	-6.10	0.31		0.18	-0.31	-1.59	0.31		0.18
Senapati	0.16	0.65	2.49	*	1.57	-0.62	-0.98	2.49	*	1.57
Pherzwal	0.78	2.41	0.78		1.36	-0.31	-0.33	0.78		1.36
Noney	0.16	1.20	1.71	+	2.09	0	0.06	1.71	+	2.09
Kangpokpi	0.93	2.73	1.25		1.88	-0.31	-1.77	1.25		1.89
Kamjong	0.16	1.04	2.80	**	2.98	0	0.14	2.8	**	2.99
Jiribam	0.47	0.80	1.87	+	2.14	-1.09	-0.79	1.87	+	2.14

Table 4. Crop water requirement for Rice

Month	Stage	Districts															
		Imphal west	Imphal east	Ccpur	Thoubal	Chandel	Ukhrul	Bisnupur	Kakching	Tengnoupal	Tamenglong	Senapati	Pherzwal	Noney	Kangpokpi	Kamjong	Jiribam
May	Nurs	1.35	1.35	1.44	0.72	1.44	0.74	1.90	0.71	0.84	0.67	0.67	0.75	0.65	0.67	0.74	1.46
May	Nurs/ LPr	17.39	17.39	18.73	12.95	18.68	13.52	24.57	12.85	15.05	12.24	12.35	13.33	12.18	12.32	13.52	19.23
May	Nurs/ LPr	63.79	63.79	68.42	68.17	68.23	72.74	90.49	67.70	80.12	64.75	66.71	71.42	64.37	64.82	72.67	70.62
		82.53	82.53	88.58	81.84	88.35	86.99	116.96	81.25	96.00	77.65	79.73	85.50	77.21	77.81	86.93	91.31
Jun	Init	56.29	56.29	60.15	59.70	59.93	65.43	81.48	59.38	71.32	57.01	60.40	63.79	56.62	56.64	65.35	62.28
Jun	Init	55.69	55.69	59.29	59.04	59.03	66.25	81.70	58.78	71.45	56.63	61.36	64.12	56.24	55.97	66.13	61.69
		111.98	111.98	119.45	118.74	118.95	131.67	163.18	118.16	142.76	113.64	121.76	127.91	112.85	112.61	131.47	123.97
Jun	Deve	55.04	55.06	58.42	58.15	58.21	64.95	74.28	57.94	70.25	55.95	60.78	64.42	55.55	55.27	64.87	61.68
Jul	Deve	55.39	55.43	58.64	58.32	58.46	64.90	66.21	58.15	70.52	56.25	61.44	66.21	55.81	55.55	64.84	62.93
Jul	Deve	55.84	55.89	58.95	58.68	58.86	65.33	59.75	58.55	71.29	56.75	62.59	68.20	56.29	55.98	65.27	64.30
		166.26	166.38	176.01	175.15	175.54	195.18	200.24	174.64	212.06	168.95	184.81	198.83	167.65	166.80	194.98	188.91
Jul	Mid	62.06	62.10	64.97	64.75	64.91	72.66	64.40	64.44	78.97	63.08	69.80	76.06	62.59	62.34	72.65	71.03
Aug	Mid	55.98	56.01	58.02	57.92	58.00	65.42	56.74	57.47	70.71	56.97	63.00	68.64	56.57	56.38	65.41	63.50
Aug	Mid	55.34	55.34	56.73	56.65	56.78	64.27	53.94	56.09	69.14	56.28	62.09	67.73	55.92	55.79	64.30	62.23
Aug	Mid	59.58	59.57	61.50	61.38	61.51	69.64	59.03	61.03	75.05	60.54	66.64	72.95	60.17	60.03	69.71	67.49
		232.96	233.02	241.22	240.71	241.20	271.99	234.10	239.03	293.87	236.87	261.53	285.38	235.25	234.54	272.06	264.25
Sep	Late	52.76	52.74	54.76	54.82	54.86	62.28	53.07	54.80	67.36	53.66	58.97	64.73	53.35	53.19	62.39	60.27
Sep	Late	49.76	49.75	51.96	52.15	52.07	59.34	50.78	52.38	64.35	50.65	55.64	61.23	50.41	50.26	59.47	57.28
Sep	Late	46.09	46.08	48.30	48.38	48.34	54.38	49.22	48.60	58.67	46.90	51.13	56.58	46.68	46.52	54.53	53.05
Oct	Late	21.51	21.51	22.67	27.10	22.65	30.07	24.27	27.25	32.17	26.21	28.31	31.56	26.09	26.00	30.18	24.82
		170.13	170.07	177.7	182.45	177.92	206.07	177.35	183.04	222.55	177.43	194.05	214.10	176.5	175.97	206.57	195.42
Total		763.85	763.96	802.9	798.91	801.94	891.93	891.83	796.07	967.26	774.55	841.89	911.69	769.4	767.74	891.99	863.85

3.5 Trend Analysis of Cop Water Requirement of Rice

The trend analysis of crop water requirement (CWR) for rice in different districts of Manipur is presented in Table 5. The Z values of CWR exhibit both negative and positive trends across all 16 districts. Positive trends, ranging from 2.84mm/11 years to 0.56mm/11 years, are observed in 14 districts. However, Bisnupur and Pherzwal show negative trends, ranging from -0.60mm/11 years to -6.60mm/11 years. This mirrors the trend observed in ETo for Manipur. Similarly, Lolhande et al. [8] noted a decreasing trend in monthly and seasonal ETo for Akola district in Maharashtra from 2005-2014, with a corresponding decrease in Crop Water Requirement.

Table 5. Trend analysis of CWR of rice for duration 2001-2021

Districts	Zc	Qi
IMPHAL WEST	0.31	2.84
IMPHAL EAST	0.31	2.84
CCPUR	0.62	2.55
THOUBAL	0.62	2.37
CHANDEL	0.78	2.66
UKHRUL	0.62	2.65
BISNUPUR	-1.09	-6.60
KAKCHING	0.62	2.29
TENGNUPAL	0.31	0.75
TAMENGLONG	0.31	2.49
SENAPATY	0.47	1.30
PHERZWAL	-0.31	-0.60
NONEY	0.31	2.39
KANGPOKPI	0.00	0.56
KAMJONG	0.62	2.66
JIRIBAM	0.31	2.13

4. CONCLUSION

The finding of this study also revealed that a particular crop grown in different 16 districts will require different amount of water due to varying ETo of those districts. It may also be stated that in a particular district selection of crop should be made on the basis of its CWR and ETo of the district. Water use for agriculture in Manipur is increased by poor soil and water management techniques. Understanding the water management techniques that optimize the use of water for agriculture is essential, as are adopting techniques that increase water use effectiveness in crop production. In order to save water and meet crop water requirement, farmers can use the study's findings as a guide when deciding

how frequently and how much to irrigate the crops that are the subject of the study. The findings of this study need to be verified in other climatic conditions, especially in arid climates where ETo variations are crucial for water management of cultural crops.

ACKNOWLEDGEMENT

I am fortunate to have had Dr. Shradhha Rawat as my advisor, and I am grateful for the support and mentorship that went beyond academic guidance. Their belief in my abilities and their dedication to my success have been a driving force behind the completion of this paper.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

- Gautam U, Nema AK, Jaiswal RK. Estimation of Crop Water Requirement (CWR) of major vegetable crops of selected agro-climatic zones of Madhya Pradesh, India. *Int. J. Curr. Microbiol. App. Sci.* 2019;8(10):895-904.
- Kumari M, Singh OP, Meena DC. Crop water requirement, water productivity and comparative advantage of crop production in different regions of Uttar Pradesh, India. *International Journal of Current Microbiology and Applied Sciences.* 2017;6(7):2043-2052.
- Hussain S, Mubeen M, Nasim W, Fahad S, Ali M, Ehsan MA, Raza A. Investigation of irrigation water requirement and evapotranspiration for water resource management in southern punjab, Pakistan. *Sustainability.* 2023;15(3):1768.
- Allen RG, Pereira LS, Raes D, Smith M. Crop evapotranspiration guidelines for computing crop water requirements. *Irrig. Drain. Food and Agriculture Organization of the United Nations (FAO), Rome, Italy.* 1998;56.
- Ndayisaba F, Guo H. Isabwe A, Bao A, Nahayo L, Khan G, Kayiranga A, Karamage, FM Nyesheja E. Inter-annual vegetation changes in response to climate variability in rwanda. *Journal of Environmental Protection.* 2017; 8(4).

6. Tadesse M. Spatial and temporal variability analysis and mapping of reference evapotranspiration for jimma zone, Southwestern Ethiopia. *International Journal of Natural Resource Ecology and Management*. 2021;6(3):108-115.
7. Jhajharia D, Singh PV. Trends in temperature, diurnal temperature range and sunshine duration in Northeast India. *International Journal of Climatology*. 2011;31(9):1353-1367.
8. Lokhande JN, Kale MU, Wadatkar SB. Trend of crop water requirement at Akola (Maharashtra), India. *Journal of Applied and Natural Science*. 2017;9.1: 441-444.

© 2024 Mayengbam and Rawat; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/108734>